
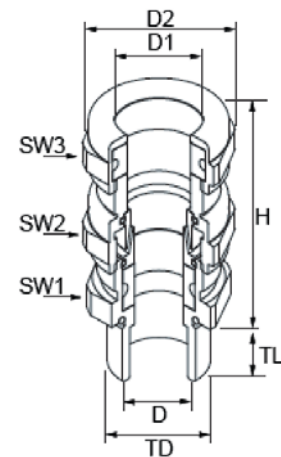


## Technical data:

Material:	nickel plated brass (standard) stainless steel (on request)
Gasket:	Silicone (Standard)
Threadt:	Metric or NPT
Certificate:	CESI 13 ATEX 033 X IECEX CES 13.0013X EAC - RUC-TR.GB05.B.00840
Type of protection:	II 2G Ex d IIC Gb II 2G Ex e IIC Gb II 2D Ex tb IIIC Db
IP grade:	IP66/68 (50 m for 30 min)
Temperature range:	-60°C ...+130°C -60°C ...+ 80°C (*)
use:	for armored or shielded cables

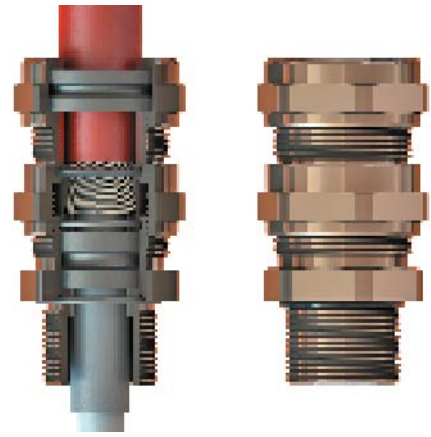

metric thread	Article number	size H / L in mm	size SW1/SW2/SW3 in mm	Ø cable inside / outside		NPT thread	Article number
				D	D1		
M16	<b>105142</b>	47 / 16	22/26/26	3 - 8,5	6 - 12	3/8"	<b>105143</b>
M 16	<b>104289</b>	48 / 16	25/29/29	6 - 12	8,5 - 16	3/8"	<b>104299</b>
M 20	<b>104288</b>	47 / 16	24/26/26	3 - 8,5	6 - 12	1/2"	<b>104300</b>
M 20	<b>104235</b>	47 / 16	25/29/29	6 - 12	8,5 - 16	1/2"	<b>104267</b>
M 20	<b>105321*</b>	50 / 16	28/30/32	8,5 - 14,5	12 - 20	1/2"	<b>105436*</b>
M 25	<b>104291</b>	48 / 16	29/29/29	6 - 12	8,5 - 16	3/4"	<b>104303</b>
M 25	<b>104236</b>	53 / 18	32/34/34	12 - 16	16 - 21	3/4"	<b>104304</b>
M 25	<b>104292</b>	60 / 16	36/40/40	12 - 20	16 - 26	3/4"	<b>104305</b>
M 32	<b>104237</b>	62 / 21	40/40/40	12 - 20	16 - 26	1"	<b>104306</b>
M 32	<b>104293</b>	78 / 21	48/52/52	15 - 26	20 - 33	1"	<b>104307</b>
M 40	<b>104238</b>	78 / 21	48/52/52	15 - 26	20 - 33	1 1/4"	<b>104308</b>
M 40	<b>104294</b>	89 / 21	55/60/60	20 - 32	29 - 41	1 1/4"	<b>104301</b>
M 50	<b>104295</b>	97 / 21	60/70/74	22 - 35	33 - 48	1 1/2"	<b>104309</b>
M 50	<b>104239</b>	100 / 21	70/70/70	27 - 41	36 - 52	1 1/2"	<b>104310</b>
M 63	<b>104296</b>	106 / 21	75/80/80	35 - 45	43 - 57	2"	<b>104311</b>
M 63	<b>104297</b>	107 / 20	85/85/85	40 - 52	47 - 60	2"	<b>104312</b>
M 75	<b>104298</b>	107 / 20	85/85/85	40 - 52	47 - 60	2" 1/2	<b>104313</b>